

# VACUUM ISOLATION VALVE (VIV)

edwardsvacuum.com

Intended for use with nXDS, XDS, nXLi and nXRi dry primary pumps, the VIV vacuum isolation valve is a high conductance, fast acting high vacuum isolation valve that is designed to prevent the movement of vapour or particulates from the backing pump to the process chamber. When the VIV is closed, the backing pump is safely vented.

The VIV protects the process chamber from being vented when the pump stops or is stopped.

When the backing pump is restarted, the valve will slowly open when the pressure within the VIV has dropped, minimising the effects of any pressure burst.



## Features

- VIV valves have high conductance
- Fast closing action
- Power failure protection
- Flexible installation options

## Benefits

- Does not restrict primary pump performance
- Prevents migration of vapour or particulates from the backing pump to the process chamber
- Prevents process chamber venting in the event of a power supply failure
- For Edwards backing pumps fitted with the M8 valve connector or the 15 way D Type logic interface connector, Edwards recommends the use of 24V dc valves and optional accessory cable or VIV Link as this offers increased levels of protection. See table below

## The VIV Valve protects the process chamber in the following situations:

| VIV Functions in event of:       | Valve electrical supply type |                |                |
|----------------------------------|------------------------------|----------------|----------------|
|                                  | 24V d.c.                     | 100-115V a.c.† | 208-230V a.c.† |
| Power failure                    | ✓                            | ✓              | ✓              |
| Drive failure                    | ✓*                           | ✗              | ✗              |
| Pump error                       | ✓*                           | ✗              | ✗              |
| Manual/remote start stop command | ✓*                           | ✗              | ✗              |

\*Maximum upstream protection for the secondary pump (if used) and process chamber is achieved by use of either the optional VIV power cable M8 - valve (nXLi and nXRi) or the VIV Link interface box (nXDS) and an appropriately sized 24V d.c. VIV valve.

†VIV Valve must be wired in parallel with the pump mains supply by the customer. This is the most cost-effective installation option but provides only power supply failure protection.

## TECHNICAL DATA

|                           |                   | Unit                  | VIV25EKA                   | VIV40EKA | VIV50EKA |
|---------------------------|-------------------|-----------------------|----------------------------|----------|----------|
| Flange type               |                   |                       | NW25                       | NW40     | NW50     |
| Operating pressure range  |                   | mbar                  | 1x10 <sup>-8</sup> to 1000 |          |          |
| Conductance               |                   | ls <sup>-1</sup>      | 11                         | 30.5     | 126      |
| Electrical supply options | 24V d.c.          |                       | ✓                          | ✓        | ✓        |
|                           | 100-115V a.c.     |                       | ✓                          | ✓        |          |
|                           | 208-230V a.c.     |                       | ✓                          | ✓        |          |
| Differential pressure     | Closing           | mbar                  | >200                       |          |          |
|                           | Opening           | mbar                  | <200                       |          |          |
| Leak tightness            | Body              | mbar ls <sup>-1</sup> | <1x10 <sup>-9</sup>        |          |          |
|                           | Across valve seat | mbar ls <sup>-1</sup> | <1x10 <sup>-5</sup>        |          |          |
|                           | Pilot valve       | mbar ls <sup>-1</sup> | <1x10 <sup>-7</sup>        |          |          |
| Switching times           | For opening       | s                     | <15*                       |          |          |
|                           | For closing       | s                     | <0.1                       |          |          |
|                           | Response time     | s                     | <0.05                      |          |          |
| Material                  | Body              |                       | Aluminium                  |          |          |
|                           | Seals             |                       | Fluoroelastomer            |          |          |


\*Time to open is related to when the pressure differential is <200mbar. This is strongly dependent on the pumping speed of the vacuum system.

| VIV flange variant | Unit | Weight | A         | B         | C         | D         | E          | F         | G         | H         |
|--------------------|------|--------|-----------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
| NW25               | kg   | 0.5    | 57 (2.24) | 48 (1.88) | 40 (1.57) | 50 (1.97) | 110 (4.33) | 30 (1.18) | 60 (2.36) | 55 (2.15) |
| NW40               | kg   | 0.9    | 57 (2.24) | 48 (1.88) | 55 (2.17) | 65 (2.56) | 126 (4.96) | 40 (1.57) | 79 (3.11) | 55 (2.15) |
| NW50               | kg   | 1.5    | 57 (2.24) | 48 (1.88) | 75 (2.96) | 70 (2.76) | 136 (5.36) | 45 (1.75) | 89 (3.50) | 55 (2.15) |

## ORDERING INFORMATION

| Product description             | Order number |
|---------------------------------|--------------|
| VIV25EKA 24V DC                 | A50637500    |
| VIV25EKA 100-115V AC            | A50637501    |
| VIV25EKA 208V-230V AC           | A50637502    |
| VIV40EKA 24V DC                 | A50637510    |
| VIV40EKA 100-115V AC            | A50637511    |
| VIV40EKA 208V-230V AC           | A50637512    |
| VIV50EKA 24V DC                 | A50637520    |
| VIVLINK C13/14 100-230V 50/60HZ | A50637580    |
| VIV cable power to valve        | A50637392    |
| VIVLINK C19/20 100-230V 50/60HZ | A50637590    |

## DIMENSIONS

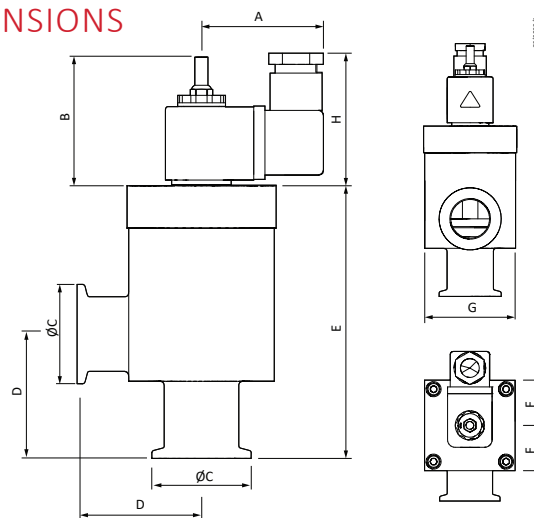

Publication Number: 3601 0569 01

© Edwards Limited 2019. All rights reserved Edwards and the Edwards logo are trademarks of Edwards Limited.

Whilst we make every effort to ensure that we accurately describe our products and services, we give no guarantee as to the accuracy or completeness of any information provided in this datasheet.

Edwards Ltd, registered in England and Wales  
No. 6124750, registered office: Innovation Drive, Burgess Hill, West Sussex, RH15 9TW, UK.

